

Specifications

| Models | GR-26J | |
|------------------------------------|-------------|--------|
| Measurements | US | Metric |
| Working height* | 31 ft 10 in | 9.70 m |
| Platform height | 25 ft 10 in | 7.90 m |
| Horizontal reach maximum** | 8 ft 3 in | 2.51 m |
| Up-and-over clearance maximum | 21 ft 10 in | 6.70 m |
| A Platform length | 2 ft 5 in | 0.75 m |
| B Platform width | 2 ft 11 in | 0.90 m |
| Toeboard height | 6 in | 0.15 m |
| C Height - stowed | 6 ft 6 in | 1.99 m |
| D Length - stowed | 9 ft 1 in | 2.76 m |
| E Width | 3 ft 8.8 in | 1.14 m |
| F Wheelbase | 3 ft 11 in | 1.20 m |
| G Ground clearance - center | 3.4 in | 8.5 cm |

Productivity

| | | |
|-------------------------------|---------------------|---------------|
| Maximum platform occupancy*** | 2 | |
| Lift capacity | 500 lbs | 227 kg |
| Vertical jib rotation | 140° (+70°/-70°) | |
| Turntable rotation | 350° non-continuous | |
| Turntable tailswing | 1 in | 25 mm |
| Drive speed - stowed | 2.8 mph | 4.5 km/h |
| Drive speed - raised | 0.4 mph | 0.65 km/h |
| Gradeability**** | 25% | |
| Turning radius - inside | 31 in | 0.78 m |
| Turning radius - outside | 92 in | 2.30 m |
| Controls | 24V DC proportional | |
| Drive | dual rear wheel | |
| Disc brakes | dual rear wheel | |
| Tires (solid non-marking) | 16-5-11 ¼ | 40.5 cm diam. |



Power

| | | |
|---------------------------|---|------|
| Power source | 24 V DC (twelve 2 V batteries, 280 Ah capacity) | |
| Hydraulic system capacity | 4.84 gal | 22 L |

| | | |
|-------------|-----------|----------|
| Weight***** | 6,250 lbs | 2,835 kg |
|-------------|-----------|----------|

| | | |
|----------------------|------------------------|--|
| Standards Compliance | ANSI A92.5, CSA B354.4 | |
|----------------------|------------------------|--|

Range Of Motion GR-26J

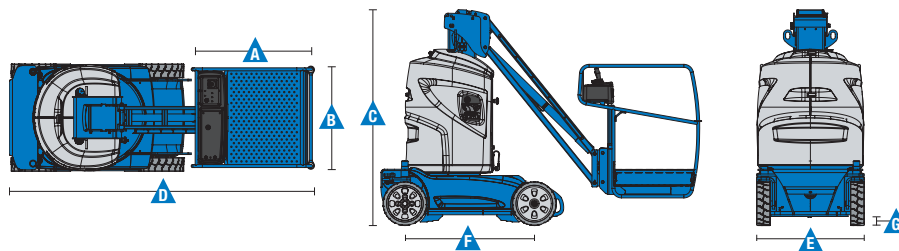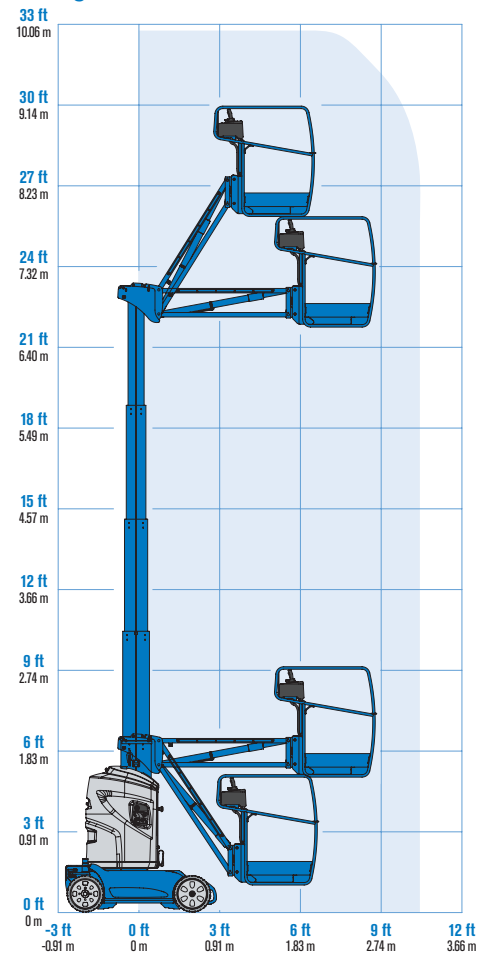

* The US equivalent of working height adds 6 ft to platform height.
 ** Non-working reach
 *** ANSI/CSA maximum occupancy is 2 indoor and outdoor.
 **** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.
 ***** Weight will vary depending on options and/or country standards.